



**A POWERFUL CHOPPER
FOR BIG BALES**

移動式切草機





BEDDING: SAVE TIME !

The Agri-Chopper chops big bales of straw, cardboard or paper to make fluffy and spongy bedding. Thanks to its powerful blower, it can be used to spread bedding evenly up to 40' (12 m) in free stall barns, hog barns and poultry barns.

Fast, accurate, the Agri-Chopper allows you to save time, energy as well as materials. Indeed, it has been proven (in our various tests) that it takes twice as much compressed straw in comparison to chopped straw to make decent bedding, resulting in lower bedding cost and less manure handling.

IMPROVED FEED QUALITY

Designed to process big bales of hay, round or square, dry or wet (baleage), the Agri-Chopper:

- helps to reduce the time spent on feeding,
- aids in the addition of fiber in the diet (in addition to making it more appetizing)
- allows full utilization of forage bales (while significantly reducing losses on leftovers).

For producers who feed T.M.R. (Total Mixed Ration), the Agri-Chopper:

- allows the addition of the exact quantity of chopped hay into every recipe,
- ensures a more thorough mix
- lessens the stress on the mixer and extends its life



ADJUSTABLE DEFLECTOR (OPTIONAL)


To direct the flow, the deep sided chute has an adjustable deflector and can be pivoted 360° either manually or from the tractor (optional).

LARGE TUB

The large diameter tub features two (2) large doors to facilitate the loading of big bales when used inside farm buildings



ACCURATE, FAST AND DURABLE

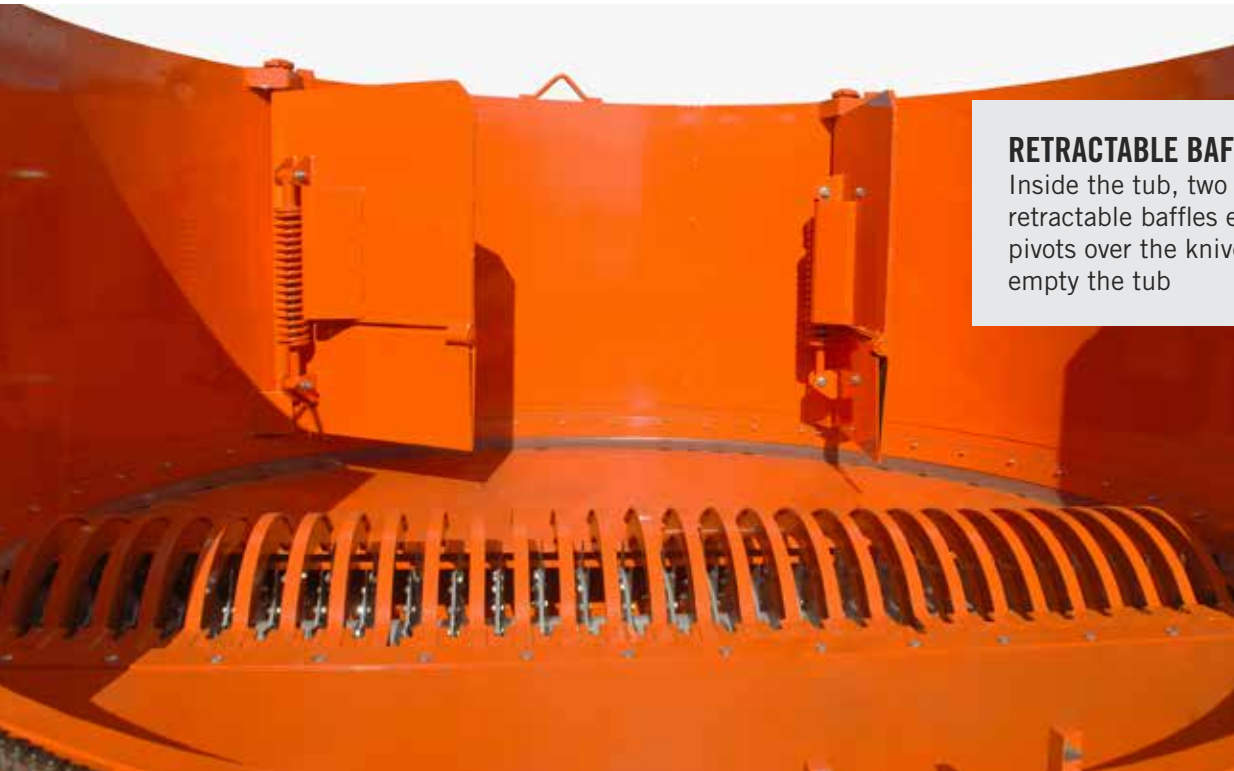


RETRACTABLE BAFFLES


Inside the tub, two (2) sturdy retractable baffles ensure the bale pivots over the knives and completely empty the tub



HIGH QUALITY KNIVES


The high quality knives of the Agri-Chopper have an incredible lifespan !

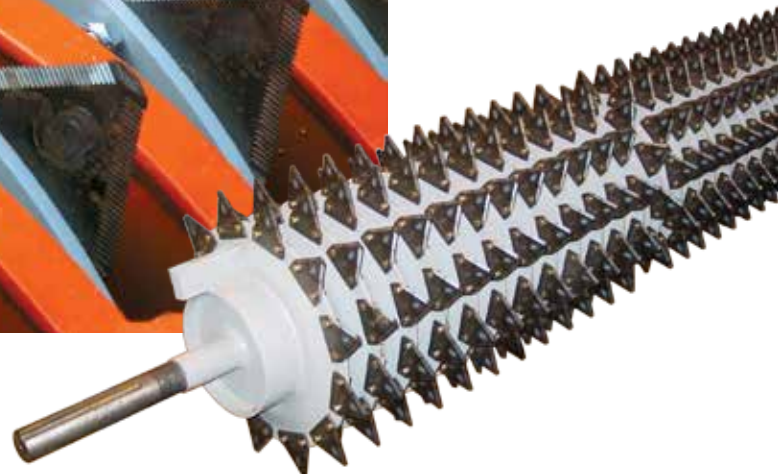

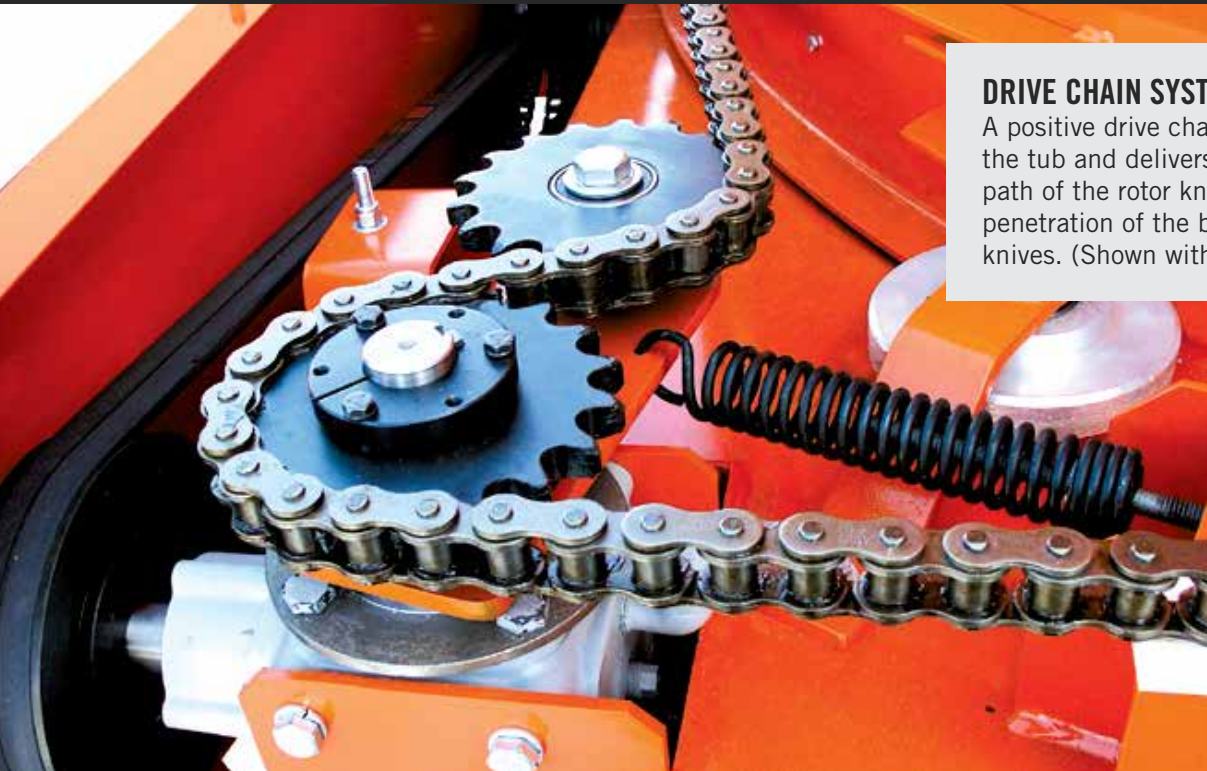

DRIVE CHAIN SYSTEM

A positive drive chain system rotates the tub and delivers materials into the path of the rotor knives. it controls the penetration of the bale into the rotating knives. (Shown with guard removed)

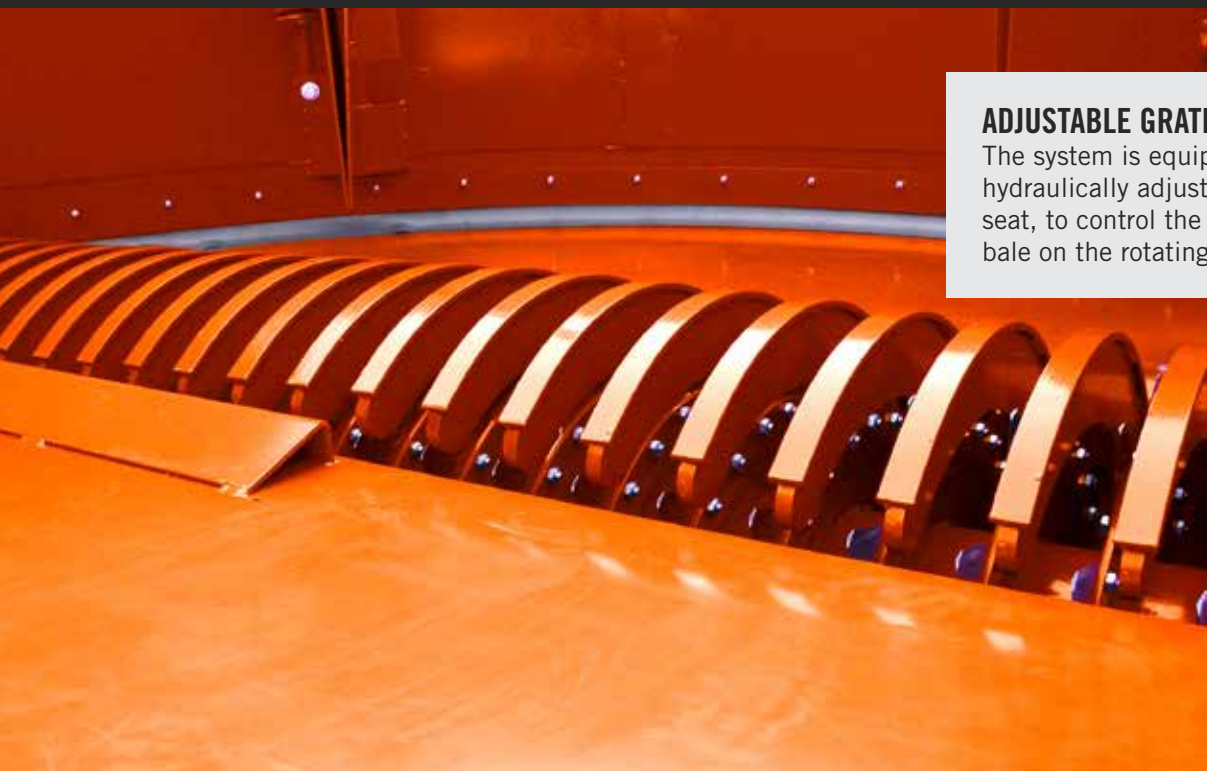

ADJUSTABLE GRATE

The system is equipped with a grate hydraulically adjustable from the tractor seat, to control the penetration of the bale on the rotating knives

THE VALMETAL AGRI-CHOPPER

- Facilitates handling and distribution of large bales
- Significantly reduces the cost of feed and bedding
- Produces a more appetizing feed and ideal fiber length (as recommended by nutritionists)
- Aids in the addition of hay in the ration for a more homogeneous mixture (TMR)
- Produces a more effective litter using less material
- Allows you to blow litter over a long distance or height (40 feet/12 m)
- Saves you time and energy!

ACCURATE, FAST AND DURABLE

- Under the rotor, a 16" (40 cm) diameter auger carries the chopped product into a powerful blower capable of projecting the ration over a distance of more than 40' (12 m) (depending on density, moisture content, etc.)
- PTO driven, the sturdy rotor features rigid knives. Special blades are used to chop cardboard or paper. The weight of the rotor acts like a flywheel and minimizes stress on the tractor PTO. The large central tube reduces the possibility of twine wrapping.






ALSO AVAILABLE

Hydraulic motor with a Flow control to manage the speed of the tub independantly of the PTO !

MINIMUM MAINTENANCE

For minimum maintenance, all chain and v-belt drive systems are equipped with automatic tighteners. All grease fittings are easily accessible without having to remove the guards. (Shown with guard removed)



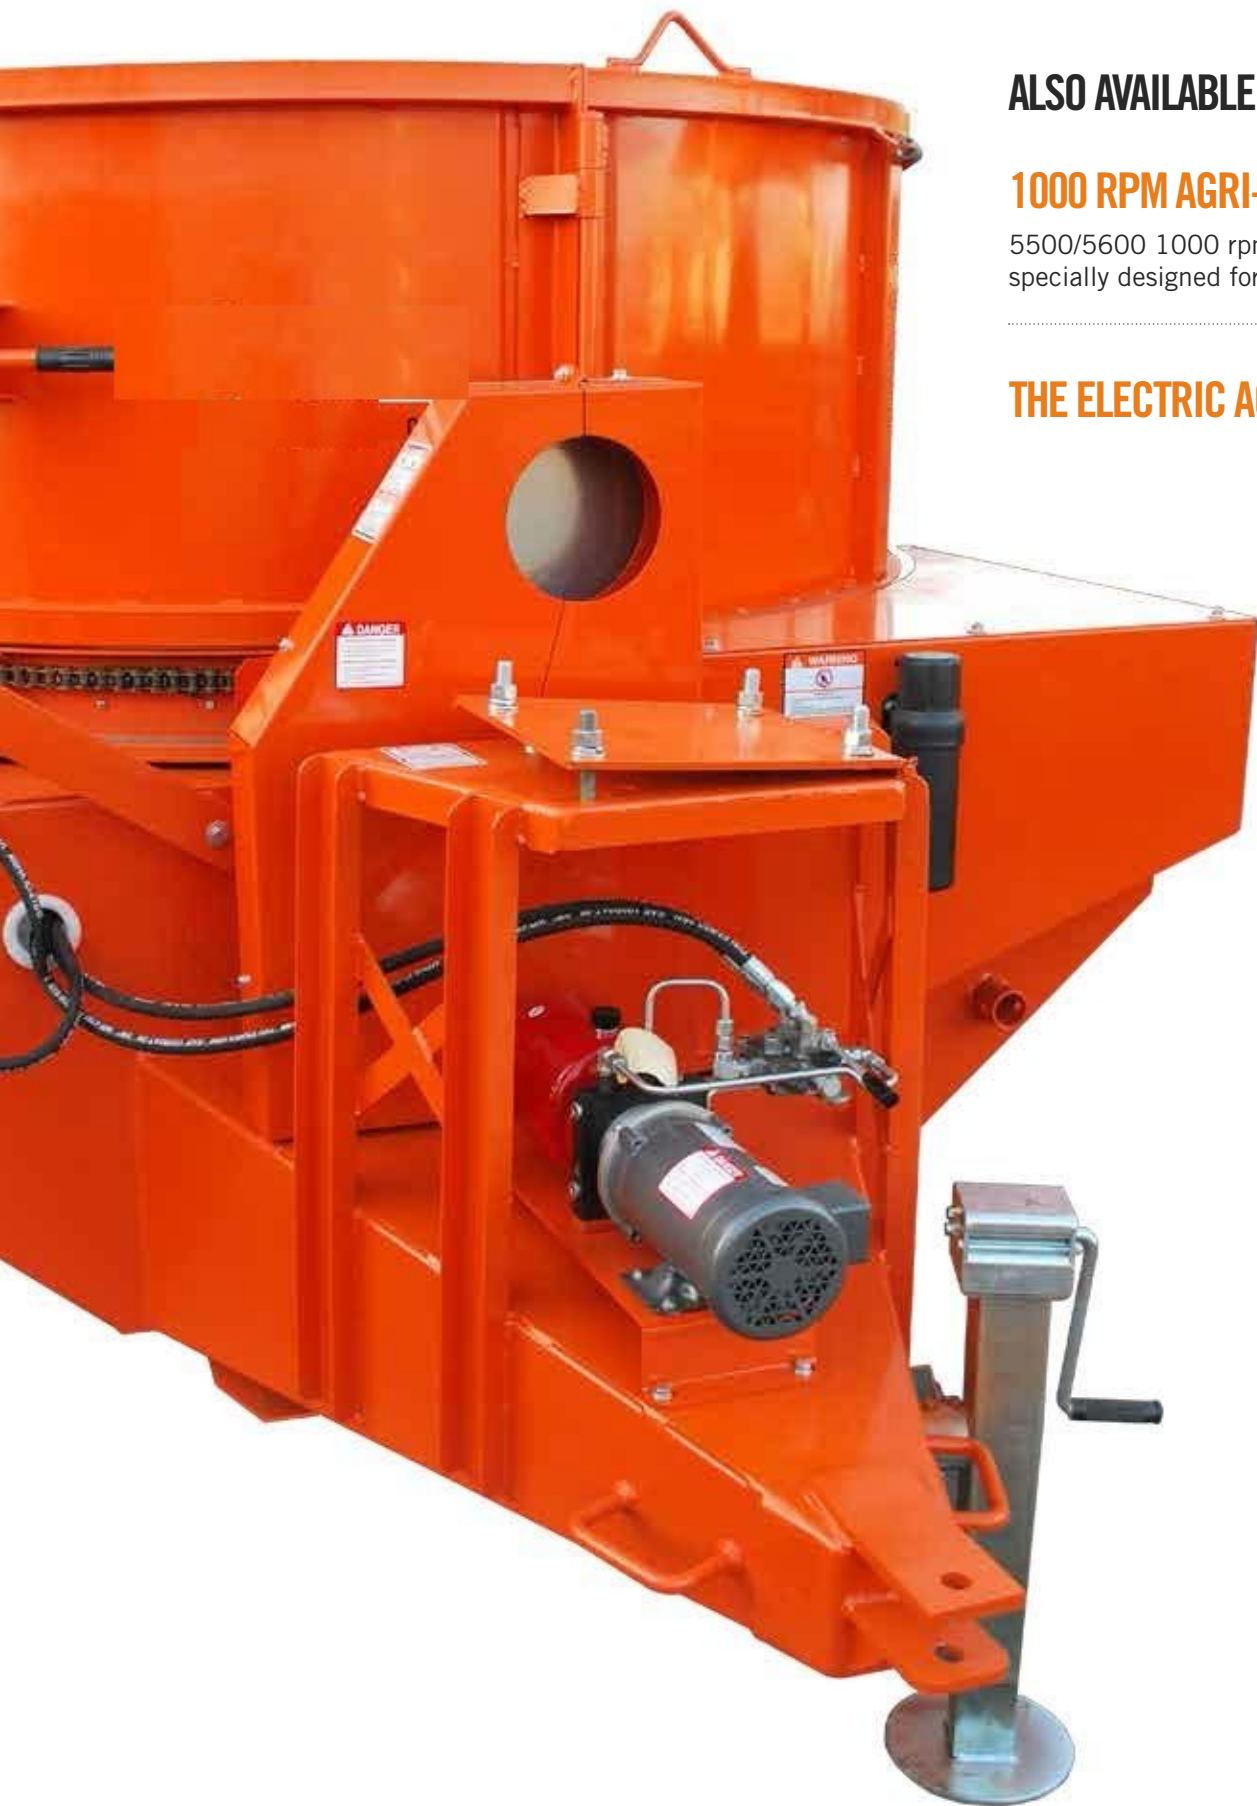

ALSO AVAILABLE

1000 RPM AGRI-CHOPPER

5500/5600 1000 rpm series has been specially designed for poultry applications

THE ELECTRIC AGRI-CHOPPER

ALSO AVAILABLE: A conical extension to avoid spillage when filling big, long rectangular bales



FEATURES

Model	H-5500	H-5600
Overall length	164" (416 cm)	176" (447 cm)
Overall width	90" (229* cm)	102" (259 cm)
Height without chute	81" (205 cm)	87" (221 cm)
Height with chute	112" (285 cm)	112" (285 cm)
Tub dimension	36" x 84" (91 cm x 213 cm)	42" x 96" (107 x 244 cm)
Maximum bale dimension	60" x 60" (152 cm x 152 cm)	60" x 72" (152 x 183 cm)
Min HP recommended at the PTO	60 H.P.	70 H.P.
Fine cut grate	Optional	Optional
Blades standard (Qty)	156	180
Blades fine cut (Qty)	312	360
PTO shaft – 540 rpm w/ safety bolt	Included	Included
Tires size	11L-15 (8 ply)	11L-15 (8 ply)
Machine weight	5030 lbs (2286 kg)	5920 lbs (2690 kg)
Other models	5500-1000 Series A 312 knives	5600-1000 Series A 360 knives

SPECIFICATIONS OF USE (BASED ON ROUND BALES)

Products 540 RPM	Approximate cutting time	Approximate cut length		Tractor
		Standard grate	Fine-cut grate	
Hay, wet hay, straws, corn plants	6 to 7 minutes	4" to 6" (10 to 15 cm)	3" to 5" (7 to 12 cm)	70 - 80 HP

Products 1000 RPM	Approximate cutting time	Approximate cut length		Tractor
		Standard grate		
Hay, wet hay, straws, corn plants	6 to 7 minutes	1" to 3" (2,5 to 7 cm)		90 - 125 HP

Note: these figures may vary according to density, moisture content, etc.

Specifications, descriptions and illustrative material in this literature are as accurate as known at the time of publication, but are subject to change without prior notice. Illustrations may include optional equipment and accessories, and may not include all standard equipment.



WEIZHOU

瑋洲企業有限公司
地址：台灣高雄市前鎮區武德街135巷24號
信件請寄：高雄市郵政信箱1394號
Tel：07-7169249 Fax：07-2134620

Weizhou International Co., Ltd

Address : No. 24, Lane 135 Wu-de St., Kaohsiung City, Taiwan ROC 80647
Mailing : P. O. Box 1394 kaohsiung City, Taiwan ROC
Tel : 886-7-7169249 Fax : 886-7-2134620
E-Mail: agri-machine@weizhou.com.tw
<http://www.weizhou.com.tw/Agrimachine/Index-import.htm>
Line : weizohu1995 Skype : service450429 QQ : 1467808036