



AGRICULTURAL MACHINERY

sitrex®




FW6

FW12

MOUNTED SIDE-DELIVERY RAKE


MOUNTED SIDE-DELIVERY RAKE



Hubs with taper roller bearings and sealed dust cover on all units.


FWW6

TECHNICAL DATA:
Working width-raking 13' 6" (4.1 m)
Working width-spreading and turning
14' 5" (4.4 m)
Weight 551 lbs (250 kg.)




FWW12

TECHNICAL DATA:
Working width-raking 28' 6" (8.7 m)
Working width-spreading and turning
32' 10" (10 m)
Weight 1366 lbs (620 kg.)



- Wheel diameter 55" (1,4 m)
- Tine number each wheel 40
- Tine diameter 0,28" (7 mm)

Performance valid for all hay rakers
of our production.

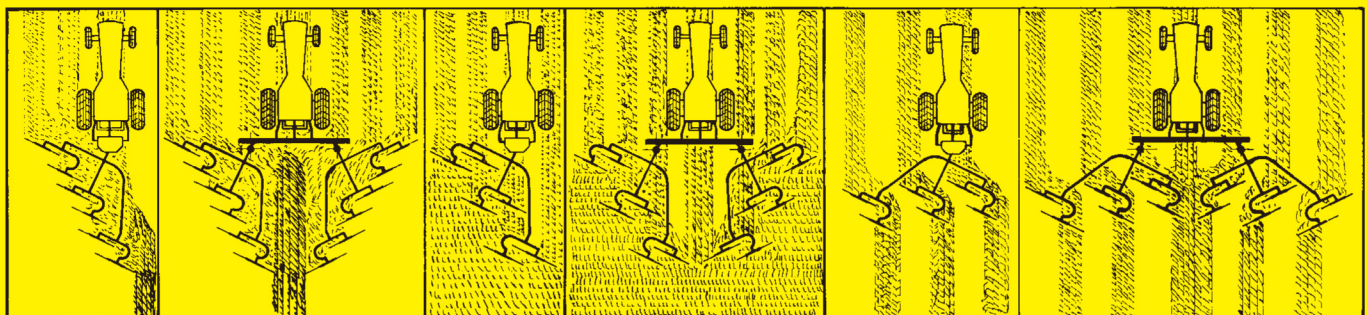

Raking

Spreading

Turning

SITREX S.p.A. reserves the right to make changes or add improvements at any time without notice. The information contained herein is general in nature and is not intended for specific application purposes.