

FERABOLI

LT ECO

圓型牧草打包機



VARIABLE CHAMBER ROUND BALER

LT ECO

BELT VARIABLE CHAMBER



FERABOLI ROUND BALERS

Feraboli round balers are designed for the maximum flexibility and reliability in any condition. Delicate with premium hay and perfect with moist fodder, also ideal with difficult products such as cornstalks and straw. Long life, high work capacity, perfectly shaped bales, compact and heavyweight: all these features make Feraboli round balers a profitable investment.



LT ECO

THE BEST AT THE LOWEST PRICE


An essential look for a matchless round baler, **LT ECO**'s performance shows concreteness and reliability for those requiring advanced technology.




PAGLIA



FIENO



WIRE
BINDING



LEGATURA
A RETE



PACKER



FEED SYSTEM

ALTERNATIVE PACKER



Ideal for short and dry mulched straw or to harvest delicate short and brittle fodder without damaging it.

BELT VARIABLE CHAMBER

SET THE SIZE YOU WANT

You can set the bale diameter as required from the control unit in the cab (between 50 and 165 cm).



BINDING



WIRE BINDING



NET BINDING



LT ECO

"EXTREME" PERFORMANCE

LT ECO offers unbeatable baling flexibility and allows you to obtain an unprecedented performance level, enhancing your operating capacity.


This model can make bales 120 cm wide at a diameter ranging from 50 to 165 cm, thus representing the ideal choice for farmers and contractors who work in variable productive contexts.




EASYTRONIC

Simple easy to use control unit to change bale diameter, baling density, binding system, all visible on a large graphic display.

PICK-UP

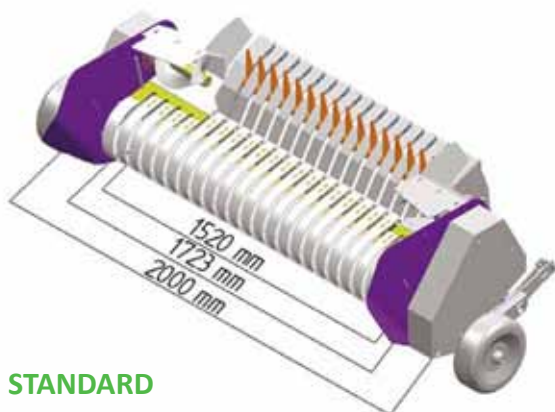

STANDARD

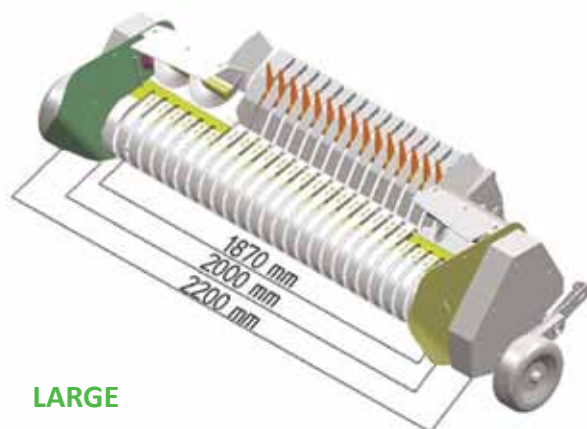

LARGE



TECHNICAL DETAILS



BALE EJECTOR



AUTOMATIC OILING



ADJUSTABLE WHEELS



CHAMBER	LT ECO
Diameter	500-1650 mm
Width	1200 mm
MACHINE DIMENSIONS	
Length	4180 mm
Width	2520 mm
Height	2600 mm
Weight	2550 kg
TRACTOR	
PTO	540 min ⁻¹ - 60 hp
Hydraulic system	1 double acting socket, 1 single acting socket.
Electric installation	1 socket 12V
PICK-UP	
Total harvesting width	2000 mm (2200 mm OPTIONAL)
Tooth pitch	69 mm
SYSTEMS	
Hydraulic	1 single acting - 1 double acting
Electric	1 electric socket 12 V
PACKER	
Type	Alternative packer
PRESSING	
Type	Hydraulic
N° belts	5 width 218 mm
Density adjustment	Electronic
BINDERS	
Wire	With settings from the cab
Net	With settings from the cab
CONTROLS	
Binders	Electric
Door	Hydraulic
Pick-up	Hydraulic
TYRES	
Size	11.5 - 15



A Division of Ken-Ding Group

瑋洲企業有限公司

地址: 台灣高雄市前鎮區武德街 135 巷 24 號

信件請寄: 高雄市郵政信箱 1394 號

Tel : 07-7169249 Fax : 07-2134620

Weizhou International Co., Ltd

Address : No. 24, Lane 135 Wu-de St., Kaohsiung City, Taiwan ROC80647

Mailing : P. O. Box 1394 kaohsiung City. Taiwan ROC

Tel : 886-7-7169249 Fax : 886-7-2134620

E-MAIL : agri-machine@weizhou.com.tw

<http://www.weizhou.com.tw/Agrimachine/i-roundbaler/index.htm>

 QQ : 1467808036

 SKYPE : service450429

 LINE : weizhou1995

 Wechat : walterhsu1995

 Viber : +886972326392

 WhatsApp : +886972326392