


Kite Golfmaster

Features

- ✓ 4.5m or 5m reach options
- ✓ Three point linkage mounting
- ✓ Twin pump independent hydraulics
- ✓ Cable or LPH controls
- ✓ Choice of heads

The Kite is designed for ground care specialists and is robust enough for a farm environment.

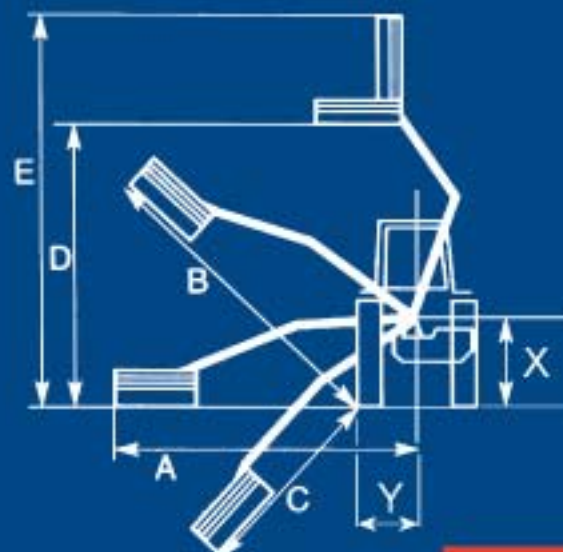

	Kite 4.5 (14'9")	Kite 5 (16'5")
A	4.5m 14'9"	5m 16'5"
B	4.34m 14'4"	4.5m 14'9"
C	3.0m 9'10"	3.6m 11'10"
D	4.4m 14'5"	4.8m 15'7"
E	5.2m 17'0"	6.0m 19'8"
X	0.89m 3'3"	1.0m 3'3"
Y	1.34m 4'5"	1m 3'4"

Working reach dimensions

Head used for calcs: 1107mm

	Kite 4.5 (14'9")	Kite 5 (16'5")
--	---------------------	-------------------

Tractor requirements

Minimum horse power	45hp	45hp
Minimum weight	2000Kg	2500Kg

Base unit mounting options

Front mount	✗	✗
Mid-mount	✗	✗
Rear mount	•	•
Three point linkage (CAT II)	•	•
Axle bracket	✗	✗

Overall machine parameters

Weight of machine without oil or head	536Kg	550Kg
Capacity of oil tank	130Litres	130Litres
Weight of machine with oil but without head	640Kg	654Kg

Hydraulic controls

Cable control (CC)	•	•
Electronic proportional control (EPP)	✗	✗
Intelligent control system (ICS)	✗	✗
Low pressure hydraulics (LPH)	•	•
Cable rotor reverse	•	•
Electronic rotor reverse	✗	✗

• = Standard
• = Optional
✗ = Not available



	Kite 4.5 (14' 9")	Kite 5 (16' 5")
Hydraulic system		
System capability	33hp	33hp
Pump flow rate	70Litres	70Litres
Pump type (Gear / Piston / Helical)	G	G
Pump arrangement (Twin / In-line)	X	X
Independent hydraulics	•	•
Oil cooler	•	•

Arm features and main frame		
Forward arm	X	X
Forward arm reach (Fixed / Variable)	X	X
Telescopic arm	X	X
Telescopic arm stroke	X	X
Power slew	X	X
Power slew angle	X	X
Gravity breakout	•	•
Hydraulic breakout	X	X
Armfloat - manual	•	•
Armfloat - electronic	•	•
Headfloat - manual	•	•
Headfloat - electronic	•	•
Left hand cutting	•	•
Right hand cutting	•	•
Left & right hand cutting	X	X

Arm attachments available		
Variable track bracket (VTB)	X	X
Cutterbar	•	•
Bladed saw head (Blade Runner)	X	X
Ditch cleaner	X	X
Rotary head	X	X

Accessories		
Road lights	•	•
Debris blower	X	X
Warning arrow (Magnetic / Fixed)	•	•
Cab guard kit	•	•

Cutting heads				MP44	T60	T40	Pro Flails	BB
900mm with 102 roller	•	•	Flails	•	X	X	X	•
1257mm LW with 150 roller	•	•	Flails	•	X	X	X	•
1107mm MVV 115 roller	•	•	Flails	X	X	X	X	•
1.5m Cutterbar	•	•						
Rotary Head	X	X						
Bladed saw head (Blade Runner)	X	X						
Sheartrim Cutterbar	•	•						



瑋洲企業有限公司

地址：台灣高雄市前鎮區武德街135巷24號

信件請寄：高雄市郵政信箱1394號

Tel：07-7169249 Fax：07-2134620

QQ：1467808036 Skype：service450429

agri-machine@weizhou.com.tw

<http://www.weizhou.com.tw/Agrimachine/Index-import.htm>