

MicroKlippa

Features

- ✓ 3.2m or 3.5m reach
- ✓ Left or right hand cutting
- ✓ Cable or Electronic Proportional Controlled (EPC)
- ✓ Front mount option
- ✓ 16-22 litres per minute



Cable control



EPC



A frame fitting





1.2 or 1.5m cutterbar



Cutterbar

The MicroKlippa is very popular with estate managers and horticulturalists who admire the MicroKlippa's fine cutting capabilities and the versatility of right or left hand cutting.

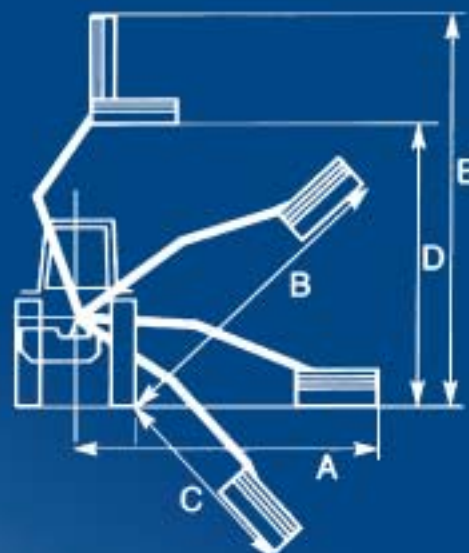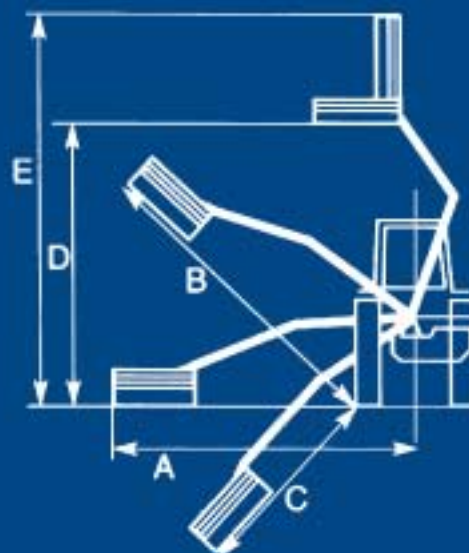

MicroKlippa

A	3.1m	10' 2"
B	3.2m	10' 6"
C	2.0m	6' 6"
D	3.5m	11' 6"
E	3.4m	11' 2"
Y	1m	3' 4"

Working reach dimensions

Head used for calcs: Sheartrim

Available for export markets only

MicroKlipper**Tractor requirements**

Minimum horse power	25hp
Minimum weight	550Kg

Base unit mounting options

Front mount	o
Mid-mount	x
Rear mount	•
Three point linkage	•
Axle bracket	•

Overall machine parameters

Machine weight with cutter bar (exc. Oil)	180kg
Capacity of oil tank	•

Controls

Cable control (CC)	•
Electronic proportional control (EPC)	o
Intelligent control system (ICS)	x
Low pressure hydraulics (LPH)	x
Cable rotor reverse	x
Electronic rotor reverse	x

Arm features and main frame

Telescopic arm	x
Telescopic arm stroke	x
Power slow	x
Power slow angle	x
Gravity breakout	•
Hydraulic breakout	x
Armfloat - manual	x
Armfloat - electronic	x
Headfloat - manual	x
Headfloat - electronic	x
Left hand cutting	•
Right hand cutting	•

Cutting heads

Rotary Head	x
Blade Runner (blade saw head)	x
Sheartrim Cutterbar	•
Ditch cleaner	x

• = Standard
o = Optional
x = Not available



璋洲企業有限公司

地址: 台灣高雄市前鎮區武德街135巷24號

信件請寄: 高雄市郵政信箱1394號

Tel : 07-7169249 Fax : 07-2134620

QQ : 1467808036 Skype : service450429

agri-machine@weizhou.com.tw

<http://www.weizhou.com.tw/Agrimachine/Index-import.htm>