



●MULTI-FUNCTION BUGGY-FK-090

This is Unilli 90 cc multi-function buggy-FK-090. It maintains power 2 stroke CVT engine with automatic electric starter and kick starter.




With safe riding design, the buggy has 3 sealed seat belts and adjustable seats, front and rear rack, headlight, rear light and brake light and frame strengthening structure. These make up an enduring, safe and comfortable buggy.



It also has optional reverse function.



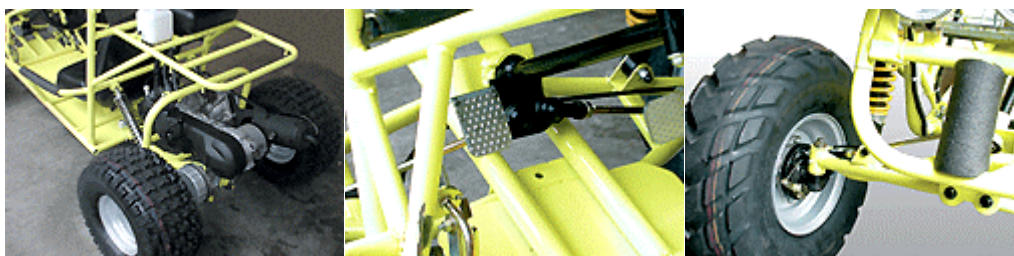

The buggy has 4 front and rear shock absorbers with front and rear a-arm to make the most comfortable riding. Front and rear brake system contains four wheel stops at the same time function to make the most smoothest riding.

Model		FK UM-090	FK UM-0901
Engine Displacement/ Type		2 Stroke 89.2CC	2 Stroke 89.2CC
Cooling		Forced Air Cooled	Forced Air Cooled
Starter System		Electric/ Kick Start	Electric/ Kick Start
Lubrication System		Autolube	Autolube
Transmission System		Automatic C.V.T. System	Automatic CUT System 1 Reverse
Suspension System	<i>Front</i>	A-Arm, Adjustable Dual Shock	A-Arm, Adjustable Dual Shock
	<i>Rear</i>	Rear-Arm, Adjustable Dual Shock	Rear-Arm, Adjustable Dual Shock
Brake System	<i>Front</i>	Dual Drum	Dual Drum
	<i>Rear</i>	Drum	Drum
Tire Size	<i>Front</i>	16x 7- 8	16x 7- 8
	<i>Rear</i>	18x 9.5- 8	18x 9.5- 8
Seat		Adjustable	Adjustable
Overall Max Height		55 inches(1350 mm)	55 inches(1350 mm)
Max Length		85 inches(2160 mm)	85 inches(2160 mm)
Max Width(Tire)		42 inches(1025 mm)	42 inches(1025 mm)
Wheel Base:		45 inches(1160 mm)	45 inches(1160 mm)



A division of ken-Ding Group

Weizhou International Co., Ltd

P. O. Box 1394 Kaohsiung City, Taiwan ROC

Tel : 886-7-7169249

Fax : 886-7-7169250

e-Mail : weizhou@cm1.hinet.net

e-Mail : shiu@ksts.seed.net.tw