



MINI TESTING HUSKER MTH-35A



Description:


MODEL: MTH-35A


MINI TESTING HUSKER

FEATURES :

1. Operation is simple and quiet. From the outside you can see the husking condition.
2. Husked rice, husks and immature paddy are separated automatically by the fan.
3. Light weight construction makes it easy for transportation.
4. Husking ratio is high and steady because the large rubber rolls are used.

MINI TESTING HUSKER

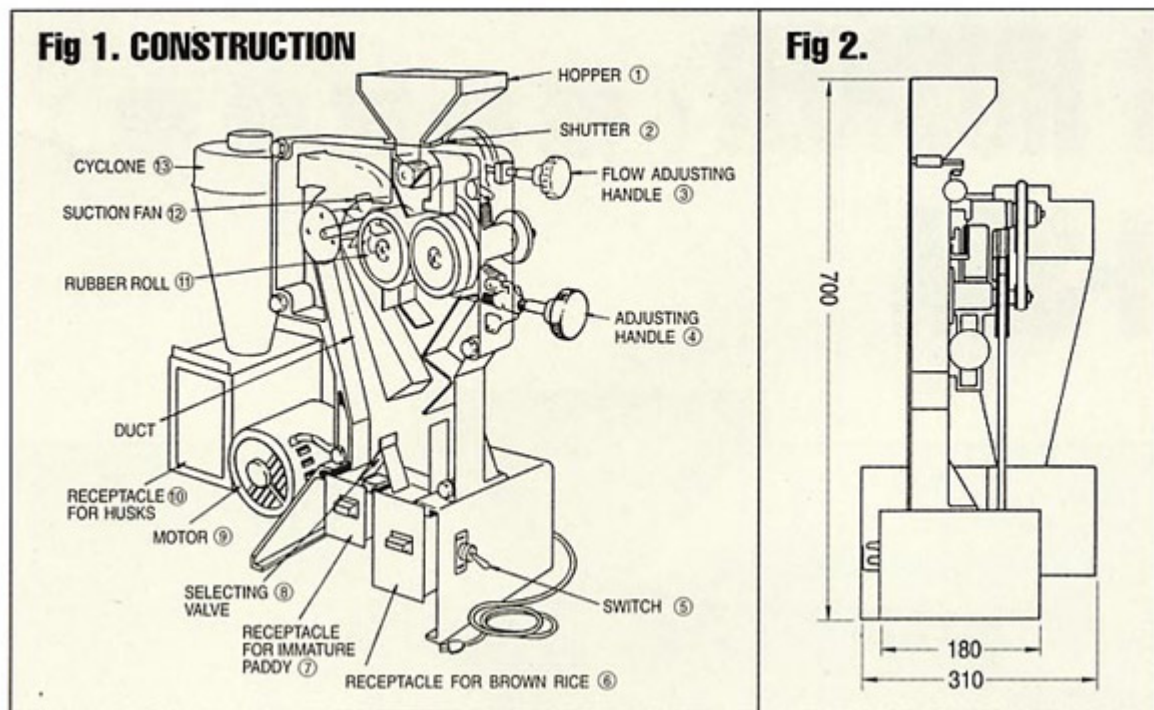

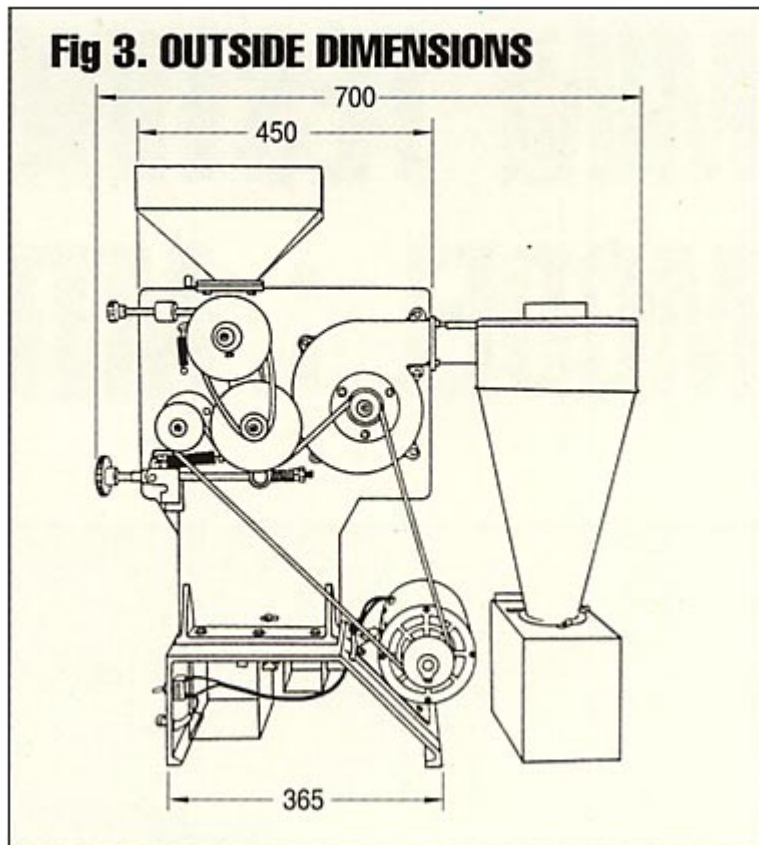

SPECIAL FEATURES :

- Extremely high in hulling ratio, this model is also equipped with rollers that can be easily replaced.
- Furnished particularly with pneumatic automatic control mechanism.
- With its extremely shaft drive system, this model minimizes energy loss in driving process. In conjunction with its solid main body, it operates quietly and generates practically little noise.
- Installed with the superb aspirator with its high performances and efficiency, this model can separate effectively the brown rice from the hulls. A large inspection window is made available for better machine operations under close supervision.

SPECIFICATIONS :

Model	Capacity/hr	Power required	Rubber Roller size	R.P.M
MTH-35A	40kg	1/4HP	1 1/2" x4"	1900 1000

Model	Machine dimensions			Packing dimensions			Gross Weight	Total Packing
	Height	Legnth	Width	H	L	W		
MTH-35A	700	700	310	750	750	360	37 kg	Volume 7.3 cft

CONSTRUCTION:

- The sample of paddy is fed to the hopper **1** installed on the machine.
- When the shutter **2** is opened, the sample flows into the machine.
- The flowing rate can be adjusted by the flow adjusting handle **3**
- Paddy is husked into brown rice when it passes through the clearance between two rubber rolls **11** which rotated at different speeds.
- The clearance between the two rubber rolls is adjusted by the adjusting handle **4**.
- Brown rice and immature paddy are separately discharged to the receptacles **6 . 7** , Husks are sucked by the suction fan **12** and are collected into the receptacle **10** through the cyclone **13** .



A division of Ken-Ding Group

Weizhou International Co., Ltd

P. O. Box 1394 Kaohsiung City, Taiwan ROC

Tel : 886-7-7169249

Fax : 886-7-7169250

e-Mail : general@weitronic.com.tw

e-Mail : shiu@ksts.seed.net.tw