




RICE WHITENING MACHINE

YBS 15 / YBS-30

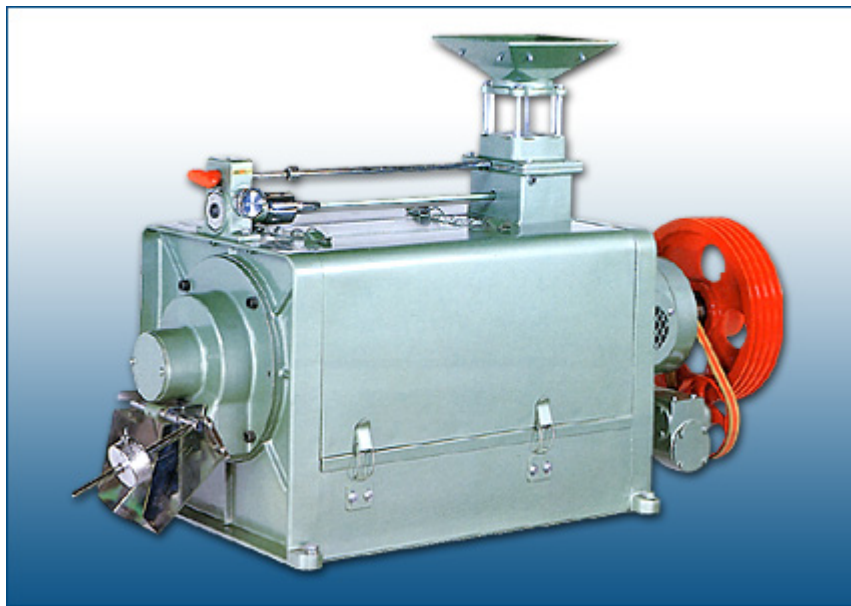

Description:

MODEL: YBS- 15, YBS- 30

**FRICTION-TYPE SPECIAL: INNER FRAME ROLLING
RICE WHITENING MACHINE**

FEATURES

1. Uniform Whitening

The bran layer on the grain surface is uniformly removed by friction generated among the grains, guaranteeing uniformly whitened rice with a smooth and lustrous surface.

2. Cooling, and Faultless Bran Removing by Jet Air

As in the case of abrasive-type machine, the friction-type rice whitening machine also features a jet air system that prevents temperature rise, and bran sticking to the grains is completely blown off and removed.

3. Operation Needs No Training


Operation is carried out simply by consulting the instruments. Smooth and easy operation guarantees rice of desired whiteness with maximum milling yield.

CONSTRUCTION

■ Brown rice is whitened by friction among the rice grains generated as they pass through the clearance between the screen and the milling roller.

■ The bran layer of the brown rice is removed by the action of grains rubbing together.

■ Jet air is blown from the fan, passing through the hollow part of the main shaft and it flowed into the milling chamber. It functions to cool the rice grains and to blow off free bran from the whitened

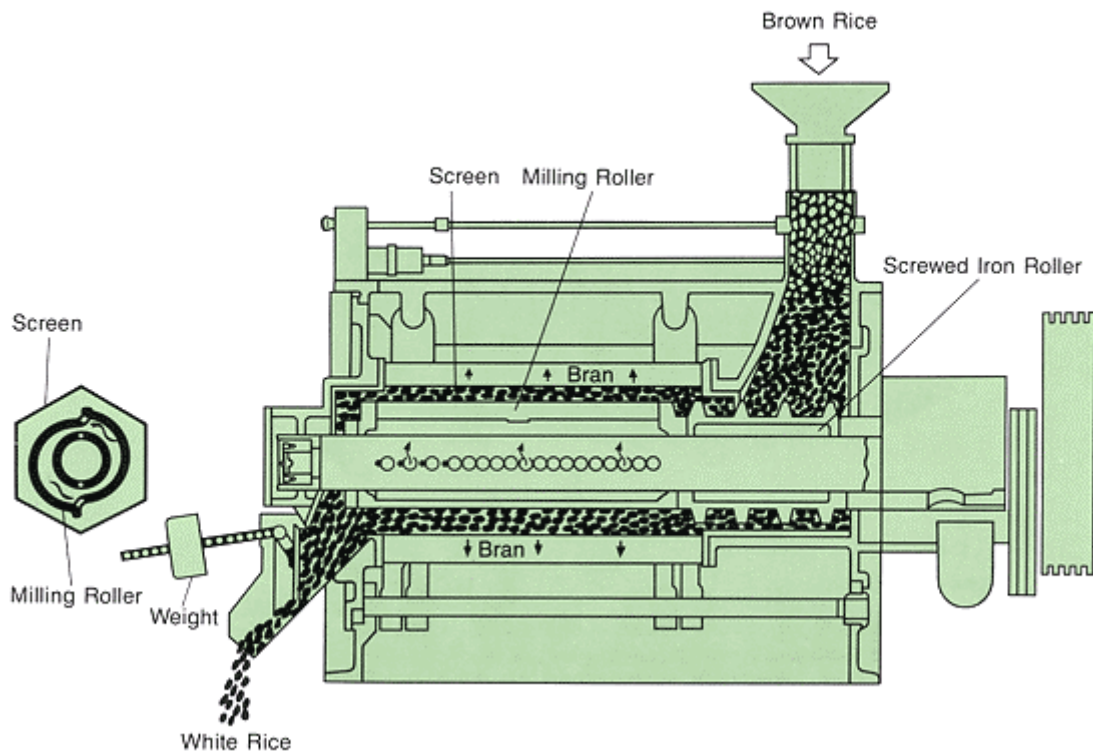

MODEL	REQUIRED POWER	IMPORT CAPACITY	GROSS WEIGHT	CFT
YBS-15	20HP	1000-1500KGS/HR	480 KGS	60 CFT
YBS-30	30HP	2000-2500KGS/HR	705 KGS	70 CFT



A division of Ken-Ding Group

Weizhou International Co., Ltd

P. O. Box 1394 Kaohsiung City, Taiwan ROC

Tel : 886-7-7169249

Fax : 886-7-7169250

e-Mail : general@weitronic.com.tw

e-Mail : shiu@ksts.seed.net.tw